


## Installation Guide


1. Load the file „free@home Firmware:ABB-free@homePanel 7“, V X.X.X, DD.MM.YYYY” from the e-Catalogue and save it on your desktop
2. Connect your PC with the System Access Point




3. Navigate to -> Settings -> Update -> „Upload Firmware“ and select the file „83221-v-0-2-688.upd“. Confirm the dialogue with „Open“.

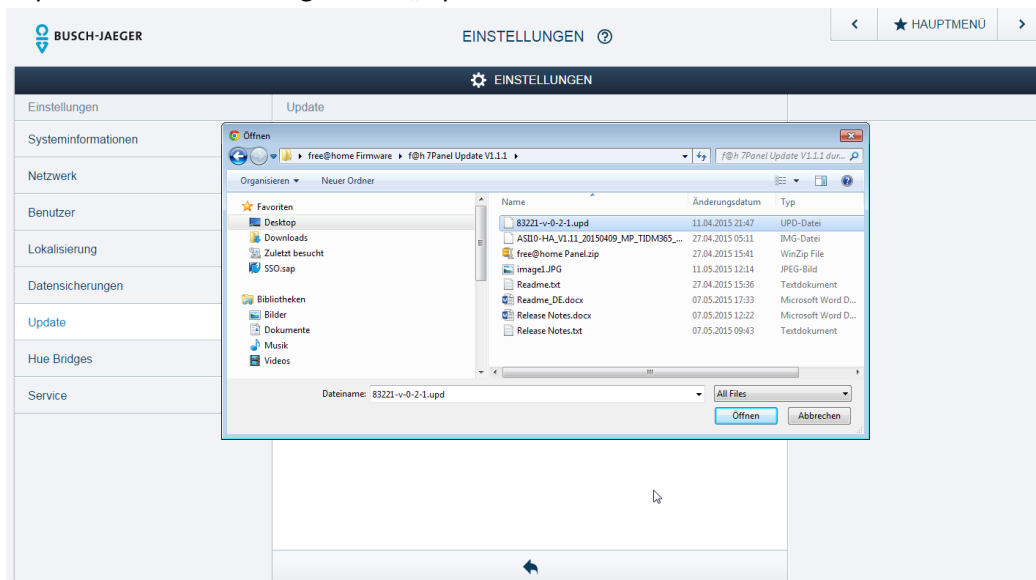

4. Confirm the dialogue with „✓“

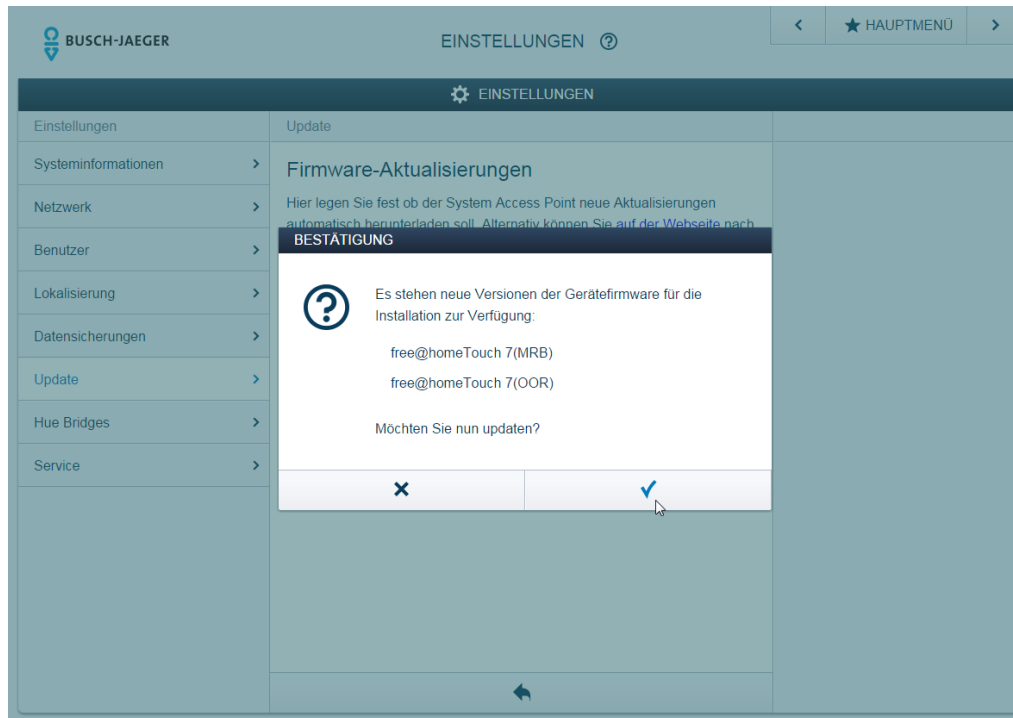


5. In case the update process does not start automatically, navigate to Main Menu -> Device Configuration and select the Panel out of the list of devices. Click on „Update to Version 0.2.3“. The update process is visualized by a progress bar.

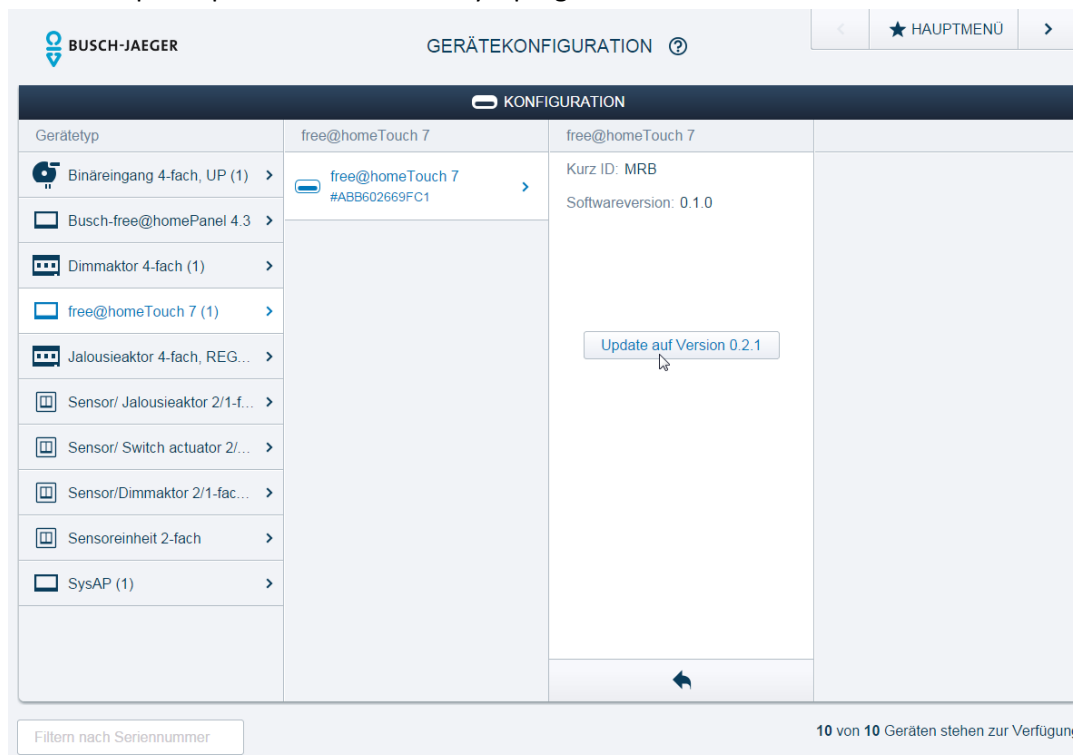

6. Once the update is finished the Panel will disappear from the list of devices for a short period of time while it is booting again.

- Download the file "Welcome Firmware: ABB-free@homeTouch 7", V X.X.X, DD.MM.YYYY and unpack the zip file.
- Copy file „ASI10-HA\_VX.XX\_XXXXXXX\_MP\_TIDM365\_customer\_filesystem.img“ from the .zip folder to an SD card.

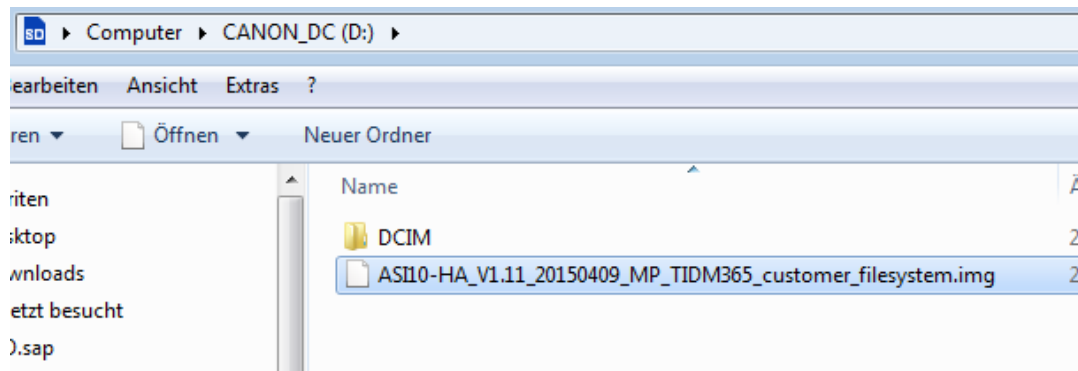

- Insert the SD card in to the Panel and navigate to System -> Firmware Update and click and click on „Updating“



- If a Weatherstation or Windowcontacts are present in the system their status will be displayed automatically on the Panel.
- Schedules and Sonos Speakers need to be configured in the Panel Manue of the free@home User Interface before they are shown on the Panel.